RevNo	Revision note	Date	Signature	Checked

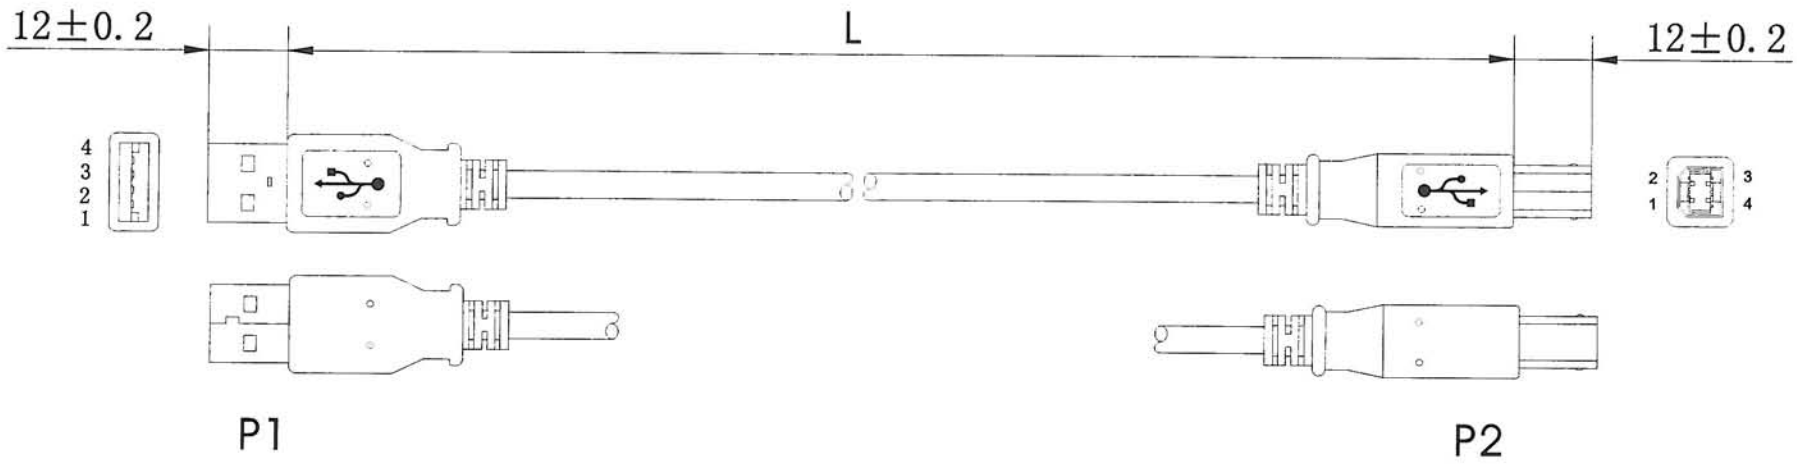

PIN OUT

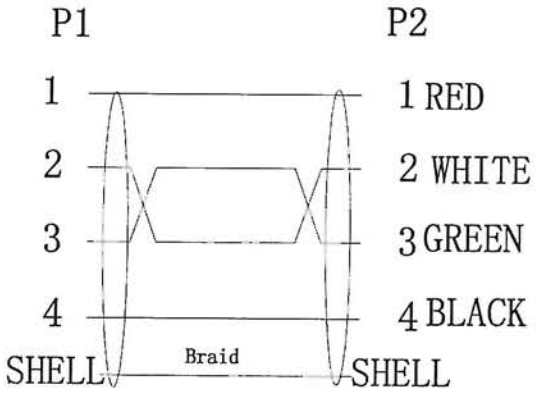

MATERIAL (ROHS COMPLIANT):

1. FOUR TYPES CABLE OPTIONAL

   [28AWG(7/0.12MM BC) X 1P + 28AWG(7/0.12MM BC) X 2C] + AL/POLY FOIL + BRAID(3/16/0.12MM AL-MG) + JACKET PVC , OD: 3.8MM

   MARKING: USB 2.0 VERIFIED FULLY RATED 30V 80°C RoHS COMPLIANT

2. CONNECTOR:

   USB A MALE, BLACK INSULATION, 3U" GOLD PLATED CONTACT, NICKEL PLATED SHELL
   USB B MALE, BLACK INSULATION, 3U" GOLD PLATED CONTACT, NICKEL PLATED SHELL

3. MOULD:
   P1/P2: PE INNER MOULD, PVC OUTER MOULD IN BLACK COLOR

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by		Checked by	Approved by – date DEC.15,2008	File name USB	Date DEC.15,2008	Scale FREE
		USB A M / USB B M(28AWG)				
					Edition 1	Sheet 1/1